

ARACUT®

Product use

For the handling of sharp and possibly hot parts in a dry environment. Thermal protection up to 100°C. Automotive industry, General mechanics with a general risk of cuts. (scrap, glass, wood and metal industries. Metal construction.

Technical description

CE CATEGORY : II Intermediary risks

In accordance with :

STANDARDS :

EN 420-03 EEC Basic standards

EN 388-03 Mechanical hazards

EN 407-04 Heat hazards

CHARACTERISTICS :

100% Kevlar® knitted glove.

Elastic wrist.

Ambidextrous.

Gauge 10.

Length : 25 cm.

HARMLESSNESS :

In conformity with the European standards.

CLEANING :

In order to keep its properties, this article should not be cleaned.

SIZES :

Error inserting Image !


DEXTERITY : Class 3.

Additional informations

Minimum packaging : 10 pairs.

Cartons of 100 pairs.

Instructions for use n°106.

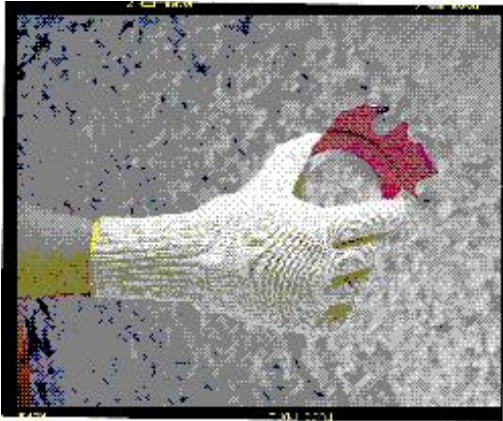

Technical specifications and norms

European directive :
89/686/CEE

Norms :
EN 420-03 ; EN 388-03 ; EN 407-04

EC type attestation :
0075/797/162/06/08/0191

Quality Assurance

Certification number :

Marking :
CE SPERIAN
20 320 86 9
EN 388 : 134X
EN 407 : X1XXXX



ARACUT®

The supplier or its legal representative supplier settled in the European community :

PERFECT FIT

declares that the new Individual Protection Equipment described hereafter :

Designation :

ARACUT®

Article code :

20 320 86

is in conformity with Directive dispositions 89/686/CEE.

This PPE has been the object of the EC attestation type :

0075/797/162/06/08/0191

delivered by :

CENTRE TECHNIQUE DU CUIR

4 rue Hermann Frenkel

69367

Lyon Cedex 07

France

Identified by the number :

0075

Made on the : **06/06/2008**

at : **ROISSY**

Division : **Body Protection**

By : **Guillaume Bigot**